


PowerMax™ MULTI-CELL PHONE COMBINERS



2-WAY | 4-WAY MULTIPLE CELL PHONE COMBINERS

USE WITH PowerMax™ AMPLIFIERS | REPEATERS


Harness the power of your antenna system with Digital Antenna's 2-way and 4-way combiners, allowing multiple cellular devices to be used simultaneously. Simply plug your PowerMax™ Direct Connect Cellular Amplifier and Antenna into the single port and your cellular devices (cellular phones or other mobile devices) into one of the cell phone inputs. Use Digital Antenna's Dash Mount Adapter Cable (C428-05 or C428-12) for convenient placement of the cell phone port.

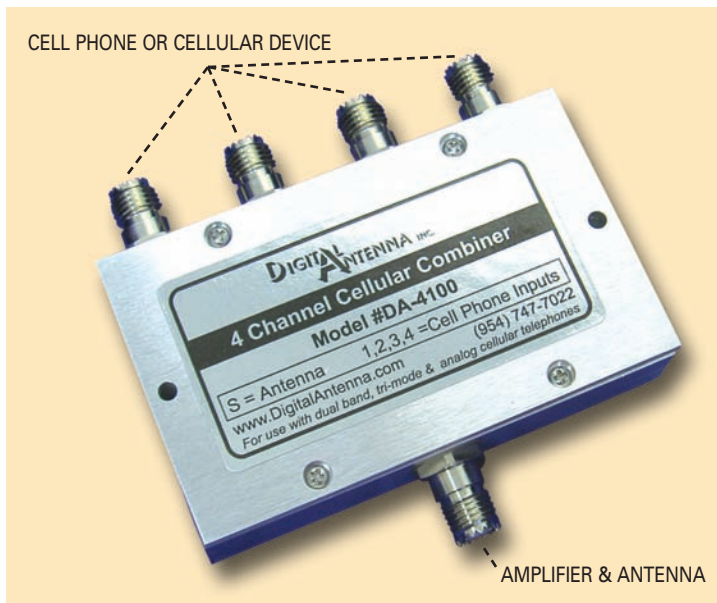

DA-4100 4-Way Combiner

Use four cell phones at the same time. Connect up to four cellular phones or cellular devices to one PowerMax™ DA4000 Direct Connect Amplifier and cell antenna. Use Digital Antenna's Dash-Mount Cable for convenient placement of cell phone input. Ideal for larger yachts to allow multi-stateroom connections.

Due to 6dB insertion loss, always use with Digital Antenna's PowerMax™ DA4000 Direct Connect Amplifier.

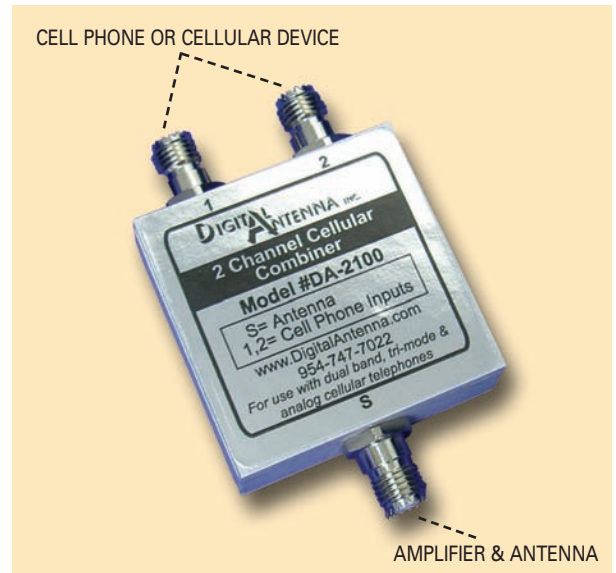

DA-2100 2-Way Combiner

Connect up to two cellular phones or cellular devices to one PowerMax™ DA4000 Direct Connect Amplifier and cell antenna. Use Digital Antenna's Dash-Mount Cable for convenient placement of cell phone input.

Product Technical Specifications

Frequency	850-2100 MHz
Impedance	50 ohm
Max Input Power	3 watts
Connectors	Mini-UHF female (50 ohm)
Insertion loss	DA-2100 = 3 dB, DA-4100 = 6 dB
Operating Temp	-40 to +75° C -40 to 167° F
Dimensions	DA-2100 = 3.25" x 2", DA-4100 = 3.5" x 3.5"



Digital Antenna, Inc.
www.digitalantenna.com

5325 NW 108th Avenue
Sunrise, FL 33351

t 954.747.7022
f 954.747.7088